

PW50-R

WATER PURIFICATION SYSTEM



CAPACITIVE TOUCH SENSOR ACTIVATION

Hygienic, easy-to-clean operation.



ACTIVATED OXYGEN SELF-CLEANING

Advanced technology circulates water and cleans tanks and lines to maintain water freshness.



ANTI-MICROBIAL SURFACES

Anti-microbial additive maintains cleanliness of unit's glass faceplate.



24/7 SYSTEM MONITORING

Continuous monitoring of system performance and water quality.



ADVANCED PURIFICATION TECHNOLOGY

Proprietary, multi-stage, reverse osmosis process is certified to industry standards.



HIGH-CAPACITY DRIP TRAY

Optional drain connection prevents need for emptying.



PW50-R

WATER PURIFICATION SYSTEM

High-end glass front panel


Capacitive touch sensors

Hot water select

Single point of dispense

Large drip tray with leak-stop technology

Dent-resistant steel frame

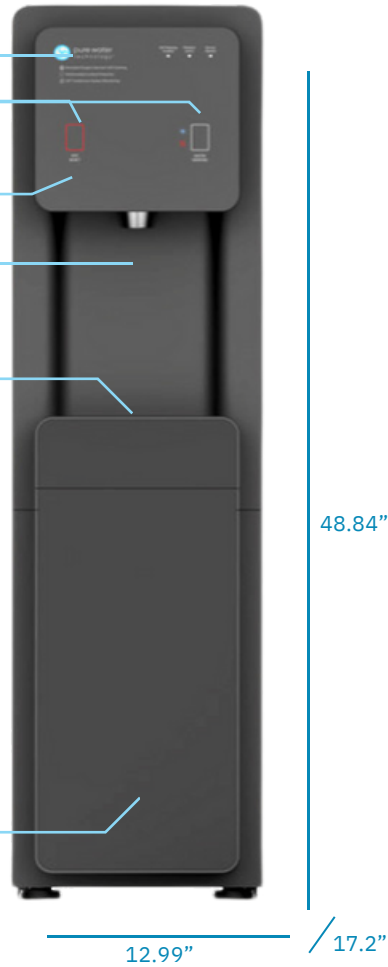

Specifications

Weight	55 lbs
Dimensions	12.99" W x 48.84" H x 17.2" L
Cold Tank Capacity	1.82 gallons
Hot Tank Capacity	0.5 gallons
Dispense Area	10.75" tall
Recommended Water Pressure	60- 70 PSI
Rated Voltage/ Frequency	120v/60hz 220v/50hz
Power Consumption	Hot: 2.5A/300W Cold: 1.0A/120W

The Pure Water Technology Purification Process




Unfiltered Water



Sediment Filter

Reduces Sediment:

- Dirt
- Rust
- Silt



Carbon Block Filter

Reduces Organics:

- Lead
- Chemicals
- Solvents
- Chlorine



0.0001 Micron Membrane

Reduces Inorganics

- TDS
- Dissolved Metals
- Arsenic



Granular Activated Carbon Filter

"Polishes" Water For Great Taste



Boost™ Filter*

Adds:

- Alkalinity
- Minerals
- Electrolytes



Activated Oxygen

Maintains Water Freshness and System Cleanliness.

* Optional feature



FLOWATER

(808) 377-4311

info@flowaterhawaii.com